

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



08 MAR 2005



(43) International Publication Date  
25 March 2004 (25.03.2004)


PCT

(10) International Publication Number  
**WO 2004/025169 A1**

- (51) International Patent Classification<sup>7</sup>: F21S 8/00, F21V 3/04
- (21) International Application Number: PCT/IB2003/003852
- (22) International Filing Date: 1 September 2003 (01.09.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 02078758.6 12 September 2002 (12.09.2002) EP
- (71) Applicant (for all designated States except US): KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): MARRA, Johannes [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (74) Agent: PET, Robert, J.; Philips Intellectual Property & Standards, Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: LIGHTING DEVICE

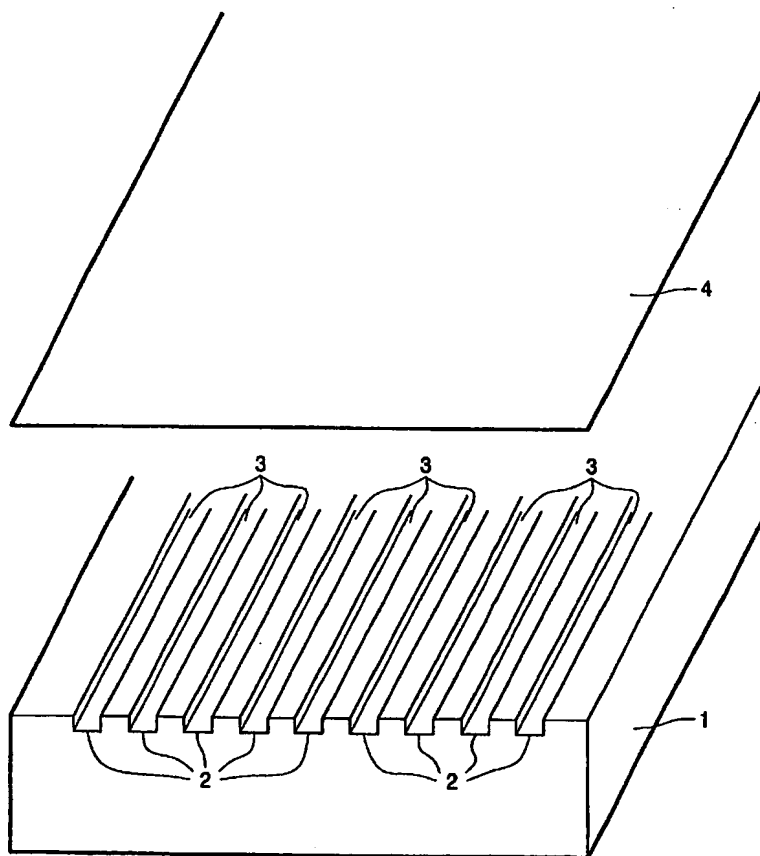

(57) **Abstract:** A lighting device comprising at least one light source arranged in a housing for emitting a lighting beam through a light-transmitting plate of the housing, wherein said plate (1) is provided with means which reflect incident light on the plate (1), in such a manner that light which locally has a higher intensity is reflected more strongly at that location than light which locally has a lower intensity, a special feature being the fact that said means comprise at least one light-transmitting plate, which is locally provided with a patterned reflective material, the reflective material reflecting more than 80% of the incident light thereon.